





Standard Cup Pigs

Designed for cleaning, batching and gauging, IK-UK's cup pig is still a universally popular style of pig. The cup design is derived from the hydraulic piston seal and aggressively scrapes the pipeline bore while maintaining a good seal.

The range is comprehensive 2" through to 56" with 2, 3 or 4 cup models and a variety of body constructions available.

In sizes 2" up to 14" a spindle (bolt) body can be offered or alternatively, the complete range up to 56" can be supplied as a multi bolt design.



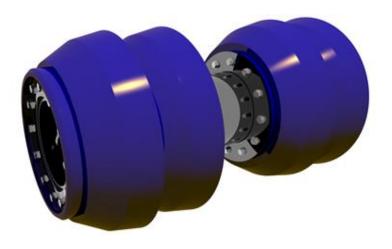

Conical Cup Pigs

These pigs are especially suitable when encountering pipe ovality and varying pipe wall thickness. Designed for cleaning, batching and gauging, IK-UK's conical cup pigs allow maximum flexibility while maintaining a positive seal.

The range is comprehensive 2" through to 48" with 2, 3 or 4 cup models and a variety of body constructions available.

In sizes 2" up to 14" a spindle (bolt) body can be offered or alternatively the complete range up to 48" can be supplied as a multi bolt design.

Other design options include the attachment of gauging plates, cleaning brushes, transmitter housings and magnets (for debris collection).

All IK-UK's pigs are supplied with polyurethane bumper nose as standard.

All IK-UK's pigs can be designed to pass 1.5D radius bends, and negotiate full bore branches.

All multi bolt pig body assemblies are welded to code standard BS EN ISO 15614-1:2004+A1:2008. NDT testing (MPI) of the welds can be performed if requested.

NEW - For Sour Service (H2S) IK-UK offers polyurethane coating of all carbon steel components





IK-Norway post@ik-worldwide.com T: +47 51 44 32 00 Royal Mechanical Group Pty Ltd sales@royalmechgroup.com T: +61 (0) 452 506 896 Online Electronics sales@online-electronics.com T: + 44 (0) 1224 714714 IK-UK sales@ik-worldwide.com T: + 44 (0) 1325 307508